



Construction Update for the Week of July 29



The construction crew was able to successfully install all the bridge beams over Crystal Creek this week. The bridge beams create the base for the roadway structure over the creek. Next week, crews will begin the two step process of pouring concrete on the bridge. The first step involves pouring the concrete that will create the new roadway on the bridge. Please note that the bridge surface concrete will take several days to set before additional work can be done. The second concrete step will create the curbs and sidewalks along the bridge.


While the concrete on the bridge surface cures, crews will work on installing the utilities around the bridge. In the coming weeks, work will also begin on the roadway connection adjacent to the bridge to create a smooth transition for drivers.

The bridge will reopen to traffic this **fall** after the roadway work is complete.



Check out the transformation and take a stroll through Old Town Algonquin!

As a reminder, the current detour impacting the section of Main Street south of Algonquin Road remains in place during bridge construction.

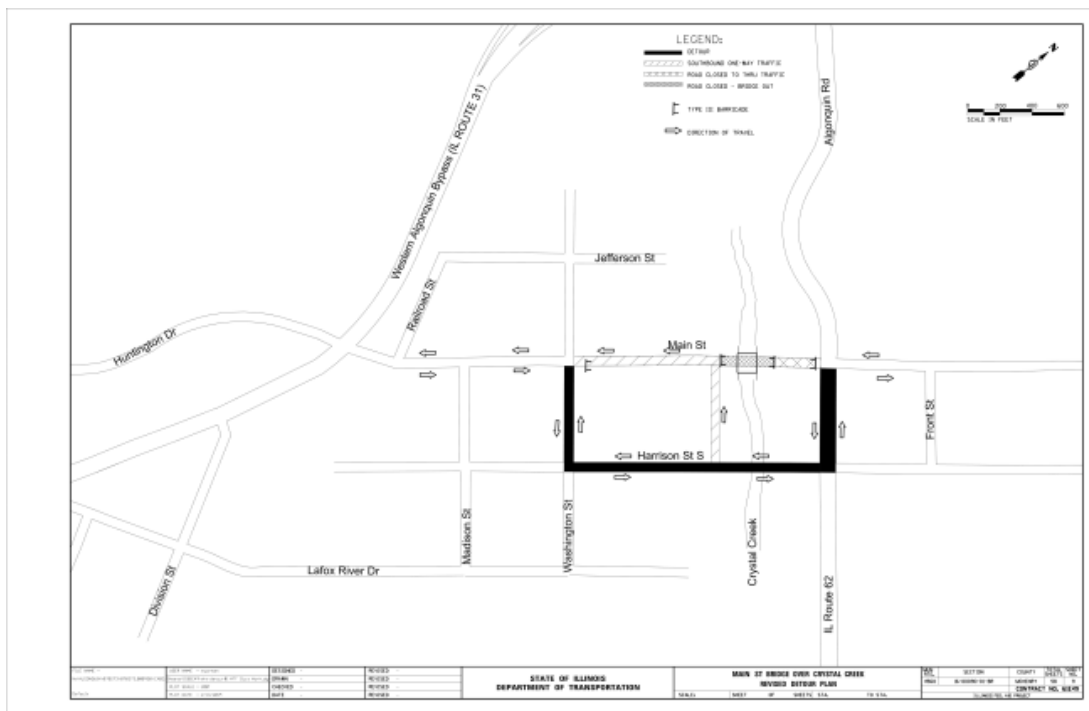

For more information and the latest detour map, visit the [Old Town project website](#).